



RIDER ELECTRIC PALLET TRUCK

RPT30

www.staxxmhe.com

Make
Your Job
Easier




RPT25/30

STAXX
STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

RIDER ELECTRIC PALLET TRUCK

MODEL				RPT20/25	RPT30
CHARACTERISTICS					
1.1	capacity	Q	kg	2000/2500	3000
1.2	load center	C	mm	600	600
1.3	operator type			walkie/rider	walkie/rider
1.4	Electric power steering(EPS)			optional	optional
DIMENSION					
2.1	lifting height	h	mm	85~200	85~200
2.2	Max. fork lifting height	H	mm	200	200
2.3	Lowered height of fork	H1	mm	85	85
2.4	Height of tiller arm in drive position min./max.	H2	mm	1030~1200	1030~1200
2.5	rear body height	H3	mm	830	830
2.6	Overall fork width	W	mm	540/685	540/685
2.7	fork length	L	mm	1150/1220	1150/1220
2.8	fork thickness		mm	54	54
2.9	fork width	E	mm	185	185
2.10	overall length	L1	mm	2378/1838(without platform) -1150 fork 2448/1908(without platform) -1220 fork	2390/1850(without platform) -1150 fork 2460/1920(without platform) -1220 fork
2.11	rear length	L2	mm	688	700
2.12	overall body width	B	mm	800	800
2.13	minimum turning radius	Wa	mm	1720	1735
2.14	Clearance		mm	40	40
2.15	aisle width (800*1200mm pallet): horizontal/vertical	Ast	mm	2858/2368(without platform)	2858/2368(without platform)
2.16	aisle width (1000*1200mm pallet): horizontal/vertical	Ast	mm	2946/2456(without platform)	2946/2456(without platform)
PERFORMANCE					
3.1	maximum traveling speed	laden	km/h	5	5
		unladen	km/h	5.3	5.3
3.2	maximum lifting speed	laden	mm/s	35	35
		unladen	mm/s	45	45
3.3	maximum lowering speed	laden	mm/s	50	50
		unladen	mm/s	40	40
3.4	gradeability	laden	%	2/5	2/5
		unladen	%	6/9	6/9
WEIGHT					
4.1	Service weight without battery		kg	490	520
4.2	Service weight with battery		kg	700	730
WHEEL					
5.1	wheel(drive/load) Type			PU	PU
5.2	wheel quantity(drive/balance/load)			1/2/4	1/2/4
5.3	size of steering wheel	ΦD	mm	230	230
5.4	size of Loading wheel	Φd	mm	78	78
5.5	size of balance wheel		mm	124	124
5.6	wheel base	Y	mm	1435	1450
DRIVING SYSTEM					
6.1	traveling motor		kw	2.2 (vertical)	2.2 (vertical)
6.2	lifting motor		kw	3	3
6.3	voltage		V	24	24
6.4	battery capacity/type		Ah	210/270/340	210/270/340
6.5	maximum battery box size(L*W*H)		mm	790X210X576	790X210X576
6.6	traveling brake			Regenerate	Regenerate
6.7	brake type			Electromagnetic	Electromagnetic
6.8	control system			F2-A (CURTIS)	F2-A (CURTIS)

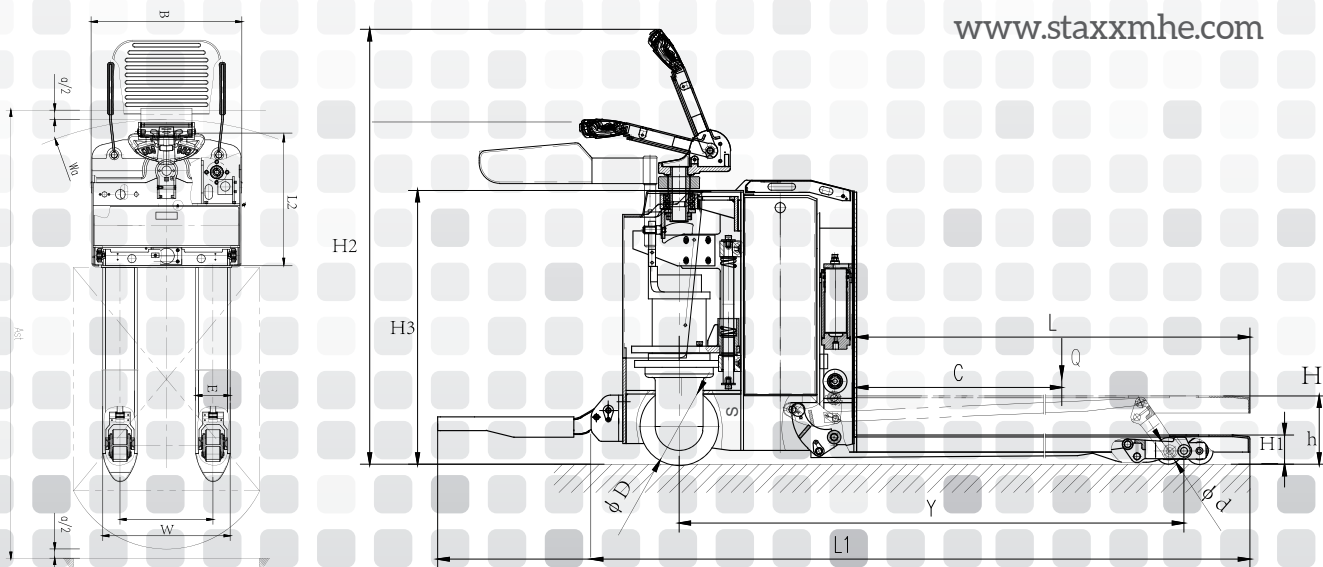

www.staxxmhe.com