

WMS-A

Manual Straddle leg Stacker

- ◆ For lifting loads, skids, racks, and objects. Forks adjust from side to side to accommodate skid widths.
- ◆ Easy and comfortable handling through ergonomically handles, effortless pulling during transport with long tiller.




- ◆ Two-swivel and two rigid casters provide four wheel support for heavy loads.
- ◆ Include wheel lock and safety screen to ensure safety during operation.
- ◆ Optional tiller pumping lifting and foot pedal lifting.



SPECIFICATIONS

MODEL				WMS-A1000-1600/ 2000/2500/3000				WMS-A1500-1600/ 2000/2500/3000				WMS-A2000-1600	
FEATURE													
1.1	Capacity	Q	kg	1000				1500				2000	
1.2	Load Center	C	mm	400									
DIMENSIONS													
2.1	Lifting height	h1	mm	1600	2000	2500	3000	1600	2000	2500	3000	1600	
2.2	Mast lowered height	H	mm	2020	1500	1770	2020	2020	1500	1770	2020	2110	
2.3	Mast extend height	H1	mm	2020	2510	3010	3510	2070	2510	3010	3510	2110	
2.4	Mast type			S	D	D	D	S	D	D	D	S	
2.5	Lowered height of fork	h	mm	75				75				75	
2.6	Ajustable fork outside distance	E	mm	210~800				210~800				210~800	
2.7	Fork length	sl	mm	1070				1070				1070	
2.8	Overall width	B	mm	1080~1360				1080~1360				1080~1360	
2.9	inner leg width	G	mm	960~1240				960~1240				960~1240	
2.10	Overall length	L	mm	1480				1480				1480	
2.11	Lifting speed		mm/time					≥16					
2.12	Lowering speed							Controllable					
2.13	Turing Radius	R	mm	1650				1650				1650	
WHEEL													
3.1	wheel(drive/load) Type			PU/Nylon				PU/Nylon				PU/Nylon	
3.2	size of steering wheel		mm	∅ 150*50				∅ 150*50				∅ 150*50	
3.3	size of Loading wheel		mm	∅ 80*50				∅ 80*50				∅ 80*50	

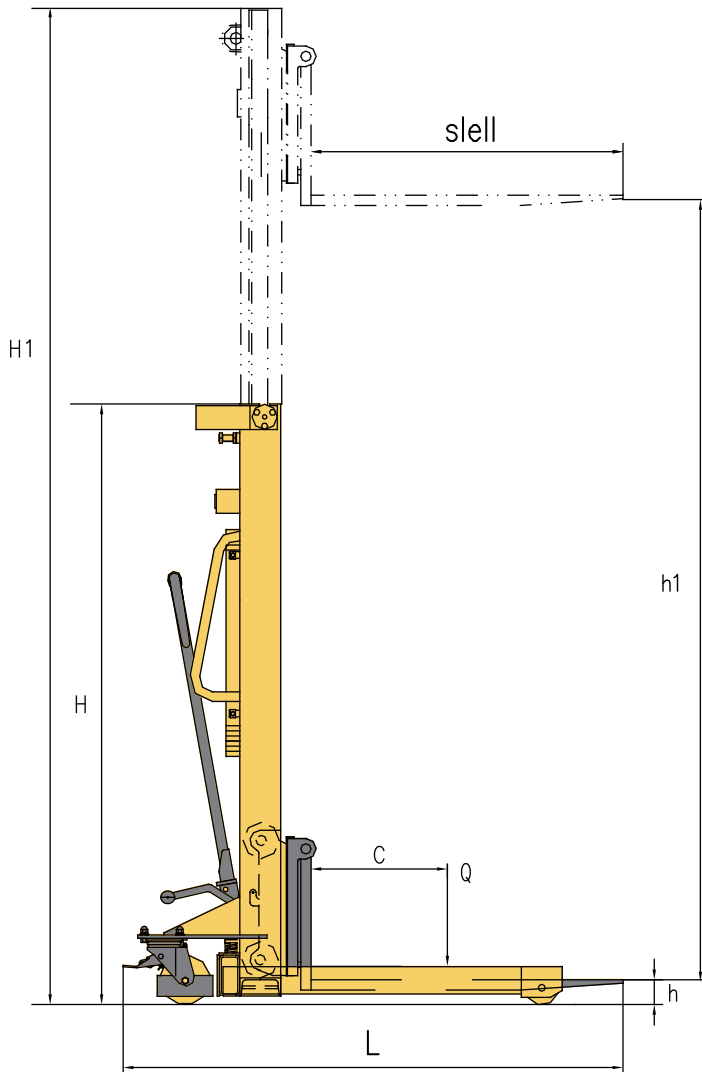

LOAD CHART

